

WHY MCINTOSH?

At McIntosh Farm Machinery, we take pride in delivering robust, high-quality equipment designed to withstand the toughest farming conditions for New Zealand farmers.

75+ Years of Expertise

A family owned and operated business with decades of experience in designing and manufacturing innovative farming solutions.

Unmatched Durability

Built with premium materials and precision engineering to ensure long-lasting performance in New Zealand's harsh conditions.

Tailored Solutions

Customisable machinery designed to meet your farm's specific needs, maximising efficiency and performance.

Reliable Support

Backed by dedicated after-sales service and expert advice to keep your equipment running smoothly.



More from McIntosh



MULTI BALE FEEDER

COMBI PRO

TIP TRAILER

BEATER WAGON



VIEW OUR SILAGE
WAGON VIDEO!

MCINTOSH BROTHERS ENGINEERING LTD

Address: 85 Armstrong Street - PO Box 4240, Palmerston North, New Zealand

Freephone: 0800 622 276 | **Phone:** +64 6 356 7056 | **Email:** sales@mcintosh.net.nz

www.mcintosh.kiwi



We stand behind every machine we build. All McIntosh products are backed by a 2-year manufacturer's warranty against defects in materials or workmanship, provided the machine has been serviced and has not been subject to misuse or operated outside its intended specifications. These terms are subject to change without notice. Full warranty terms are available by scanning the QR code.



mcintoshfarmmachinery.co.nz

SILAGE WAGON

600 - 1900



**BUILT
TOUGH**

**TRUSTED
EVERYWHERE**

The McIntosh logo, which consists of a stylized gear icon with three vertical bars inside it.

MCINTOSH

SILAGE WAGON


600 – 1900

McIntosh Titan and Multicrop Silage Wagons are built tough for New Zealand’s rugged conditions. With fully welded steel construction and no bolted joints, they offer exceptional strength and long-lasting durability. Proven feed systems ensure consistent delivery, while McIntosh’s renowned build quality guarantees reliable performance year after year.

The Multicrop delivers core McIntosh strength and reliability at a more accessible price, with the same durable build and efficient feed system. The Titan steps it up for tougher conditions, with 13 mm chains, larger sprockets, shafts, and gearboxes for extra strength and power. Both models are built for practical rural performance, without compromise.

Series	Capacity Range	Floor & Elevator Chains	Floor Slats
MULTICROP	9.1–14.3 m³	10 mm high-tensile chain	50 x 25 mm
TITAN	9.1–27.2 m³	13 mm high-tensile chain	75 x 40 mm

STANDARD FEATURES

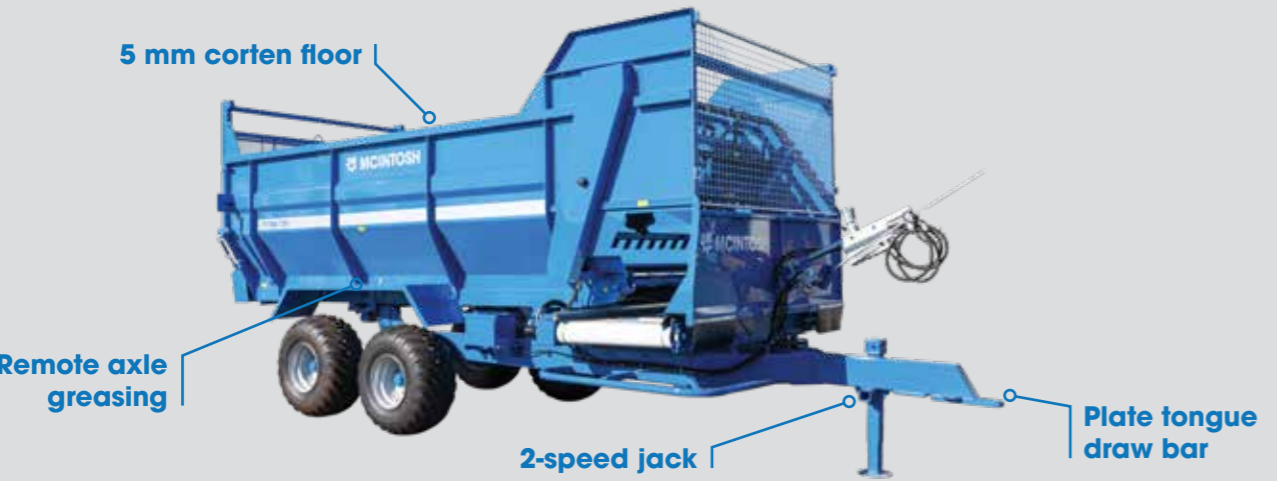

Auto floor chain tensioner (optional)



Vertical elevator



40-1 German reduction gearbox



Pivoting cross conveyor with tracking strip (optional)

OPTIONAL EXTRAS

- ☐ Conveyor belt 1200 mm wide
- ☐ Brakes on 4 wheels
- ☐ 16 mm chains
- ☐ Conveyor roller chain 900 mm wide
- ☐ Air brakes
- ☐ Electric floor speed control
- ☐ Conveyor roller chain 1200 mm wide
- ☐ Dummy load cells
- ☐ Elevator gearbox
- ☐ Hydraulic conveyor extension 200 mm
- ☐ Remote display
- ☐ RHS mudguard protection
- ☐ Pivoting cross conveyor
- ☐ Bluetooth
- ☐ Swivel drawbar tongue
- ☐ Brakes on 2 wheels
- ☐ Air bags
- ☐ Walkway 250 mm wide
- ☐ 4 Floor chains
- ☐ Truck axles
- ☐ Grease gun holder
- ☐ 4 Elevator chains
- ☐ LED lights
- ☐ Auto floor chain tensioners

SPECIFICATIONS

Model	Cubic Capacity (m³)	Cubic Tonne (m³)	Width (mm)	Length (mm)	Loading Height of Bin (mm)	Tare Weight (kg)	Tyre Size	Cross Conveyor Height (mm)	Floor Chains	Inside Width (mm)	Inside Length (mm)	Inside Height (mm)
600	9.1	6	2350	6410	2240	3465	11.5/80-15.3	650	2	2050	4100	1130
700	10.1	6.75	2350	7400	2240	3505	11.5/80-15.3	650	2	2050	4550	1130
800	12.4	8	2350	7400	2580	3705	12.5/80-15.3	750	2	2050	4550	1380
900	14.3	9	2450	8150	2600	3980	15/70-18	730	3	2050	5250	1380
1000	16	10.5	2450	9300	2600	5010	385/65R22.5	730	3	2050	5850	1380
1200	17.6	12	2450	9600	2600	5548	385/65R22.5	730	3	2050	6450	1380
1400	20.2	13.6	2750	9600	2600	5905	385/65R22.5	730	3	2050	6450	1380
1500	21.5	14.6	2450	9600	2900	6085	385/65R22.5	740	3	2050	6450	1680
1700	24.8	17.5	2940	9600	2950	6615	500/60-22.5	740	4	2050	6450	1680
1900	27.2	19	2940	10250	2950	6985	550/60-22.5	740	4	2050	7050	1680

NB: All weights and measurements are approximate and dependent on specifications and may change without notice.

