



MCINTOSH
FARM MACHINERY

MULTI BALE FEEDERS



STRENGTH / QUALITY / PERFORMANCE

MULTI BALE FEEDER

The McIntosh Multi Bale Feeder has been designed to incorporate strength, ease of use and years of trouble free use. With a spear loading system and low centre of gravity, the McIntosh Multi Bale Feeder will lead the way in feeding out machines.

The Multi Bale Feeder with spear loading system features two box sections running through the cradle for greater strength and a lower centre of gravity rather than having the feeder on top of the chassis runners. With a lower centre of gravity, the tyres can be kept in closer towards the centre of the Bale Feeder. Also with the wider cradle there is a much smaller chance of running over the product even when there is a strong wind and in muddy conditions.

STANDARD FEATURES

- 1" high tensile bar drive dog pins (direct drive)
- 3" 12,000lb zinc - plated roller chains
- 5mm thick medium tensile end plates
- 8-tooth sprocket for longer life and better drive
- Bolt on slats
- Bronze bushes on drive shaft - no bearings
- Covered drive shaft to stop wrapping of silage
- Dual aggression pins
- Diverter valve so only two hydraulic banks are required for three operations
- Easy access grease points
- Feeds out either side
- Fully enclosed galvanised plate floor
- Heavy 8mm thick angle slats for better ripping of bales
- Large heavy duty motor with 1 1/4" drive shaft
- Rear Lights
- Low maintenance
- Two boxes to hold wrap & netting
- Stand to help pull netting off
- Swivel draw bar
- Teeth are bent for better ripping of bale
- Tyres - 11.5/80-15.3



OPTIONAL EXTRAS

- Square bale attachment
- Trough extension arm
- Tyres - 11.5/80-15.3 tractor tread
- 400/60-15.5 semi aggressive or tractor tread


SPECIFICATIONS

- Length: 6940mm
- Width: 2300mm
- Height: 1100mm
- Weight: 2180kg

MULTI 4 BALE FEEDER FEATURES



- Loaded with 3 round bales. A fourth bale can be carried on the rear spears. This bale feeder is fitted with the optional 11.5/80-15.3 tractor tread tyres.

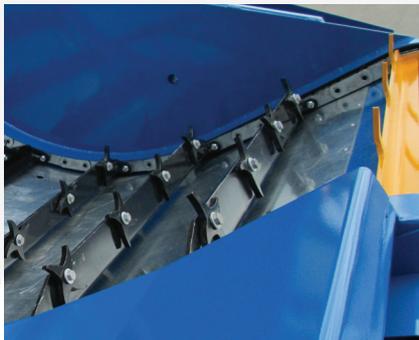

- With the yellow slat located on top of the cradle, the rolling teeth are set in the loading position. The rolling teeth ensure the bale doesn't get stuck when being pushed onto the cradle which makes loading a breeze



- Once the bale is loaded onto the tray the back stop pushes the bale forward and returns for the next bale



- Loaded with two round and one eight foot square bale



- The double ram loading system lowers the bale gently all the way to the cradle without sudden drops



- Diverter valve which changes the oil flow from loading spears to the sliding frame which pushes the bale along



- Steel box to hold plastic wrap. The galvanised mesh floor allows water and dirt to fall out and reduces the smell compared to an enclosed box



PRODUCT RANGE

FORAGE WAGONS

Available from 7.8 – 25m³, McIntosh Wagons are renowned for their strong, fully-welded steel sides, true bathtub design and elevator angle that allows it to start every time - even when the front is fully loaded.



TIP TRAILERS

Available from 4.5 – 20 tonne, McIntosh Tip Trailers are built tough enough to take full loads of metal for years. It's no wonder we've earned a reputation as the strongest trailer around.

BEATER WAGONS

Available from 12-20m³, three PTO horizontal driven beaters are designed to blend different products and feed out in an even and consistent manner. These units are well suited for feed pads.



MANURE SPREADERS

Available in 7.5, 10.8, and 13.5m³, McIntosh Manure Spreaders are designed to spread a wide variety of products in a consistent and even manner. New 13mm floor chains and improved sealing rubbers have enhanced the performance and build quality.

MCINTOSH BROTHERS ENGINEERING LTD

- 85 Armstrong Street | PO Box 4240 | Palmerston North, New Zealand
- Freephone: 0800 622 276 | Phone +64 6 356 7056 | Fax +64 6 356 7055
- sales@mcintosh.net.nz | www.mcintosh.kiwi
- Australian Distributor | Trac Mac Farm Equipment | Drouin Victoria | 041 851 5510 | allans@tracmacs.com.au

All equipment is guaranteed for 12 months from the date of entering service, provided it has not been subject to improper usage and/or overloading or any other conditions contrary to the manufacturers' specifications or recommendations. Specifications are subject to change without notice.